Flexible planning for steam rooms
There is often little space available for the technical equipment of steam rooms. A specially developed system makes it possible to pre-assemble and wire all technical components on a mounting plate, enabling quick and space-saving installation in a technical niche. Maintenance is also made significantly easier as a result.

PLUG IN PLAY

- **Pre-assembled technical components**
- **Very compact design for the steam room system**
- **Flexible configuration of the required components**
- **Specially designed for SPA EMOTION multifunctional steam showers with heat-retaining ceramic tiles**
- **In collaboration with LUX Elements and Sommerhuber Keramik**

MODULECONCEPT

EXEMPLARY SCOPE OF DELIVERY
as a complete package for one steam room with a room volume of max. 5 m³ with one bench

STEAM GENERATOR

Details see pages 110/111

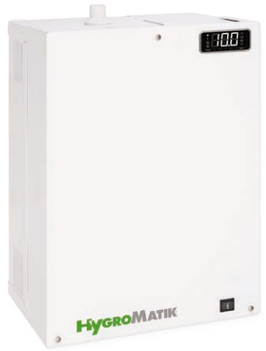

- 1 x Steam generator - Standard Line - SLE05 - Part no. 29459
- 3 m Steam hose DN25 - Part no. 17125
- 1 m Drain hose 1¼" - Part no. 17000

FRAGRANCE PUMP

Details see page 96



- 1 x DUFTDOS-0-230V Compact - Part no. 17630



- 1 x Dosing set consisting of:
  Dosing valve VA ⅜" 4 x 1 and 3 m dosing hose PTFE 4 x 1 - Part no. 12596

CONTROL SYSTEM

Details see page 175



- Controller in metal control box 380 x 380 x 210 mm (W/H/D) with main switch
- Touch Screen 4,3", 64.000 colours, full-graphic
- Box for in-wall mounting of the Touch-Screen
- 2 x PT1000 temperature sensors with 5 m connection cable

Controls
- Steam generator (on/off, temperature controlled)
- Exhaust fan (230 V, temperature controlled)
- Fragrance pump (230 V, pulse-pause time)
- Illumination circuit Spots (230 V, on/off)
- Illumination circuit Linelights (230 V, on/off)
- Bench heating (230 V, on/off, temperature controlled)
- Measuring of the room temperature (PT1000)
- Measuring of the bench temperature (PT1000)
- Connection accumulative fault message of the steam generator

Operation via Touch Screen 4,3", 64.000 colours, full-graphic with box for in-wall mounting

ILLUMINATION

Details see pages 104/106/108



- 2 x LED Spots Warm White IP67 - Part no. 21640 (quantity according to detailed cabinet size)
- 2 x Mounting sleeve for LED (quantity according to detailed cabinet size, characteristic according to ceiling construction)
- 1 x Extension cable (quantity and lengths according to detailed cabinet size)



- 1 x Dimmable transformer for LED Spots Warm White - Part no. 27404



Lineligths according to lengths and shape of the bench on demand

MOUNTING BOARDS / GUIDE-RAIL



Factory-made pre-installation of above components on mounting boards with guide-rails consisting of:

- 2 x Mounting board (1 x base- / 1 x guide-rail-board) W 700 mm x H 1.830 mm x D 550 mm
- 3 x Guide-rail
- Factory-made pre-installation and -wiring